



X-LITE KURULUM TANITIMI

X-Lite programının kurulum aşamalarını aşağıdaki yönergelerden takip edebilirsiniz.


1. Bilgisayarınızın internet tarayıcısına, aşağıdaki şekilde gibi gösterilen adres alanına <http://tescom.com.tr/lite.exe> linkini yazınız.

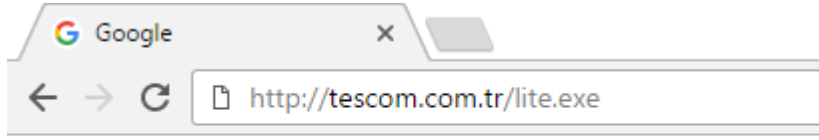

2. Daha sonra indirmek için klavyenizdeki “ **ENTER** ” tuşuna basarak X-Lite uygulaması indiriniz.
3. Aşağıdaki resimde, pencerenin sol alt kısmında görülen indirilen dosya üzerine, farenizle çift tıklayarak kurulum için başlatınız.

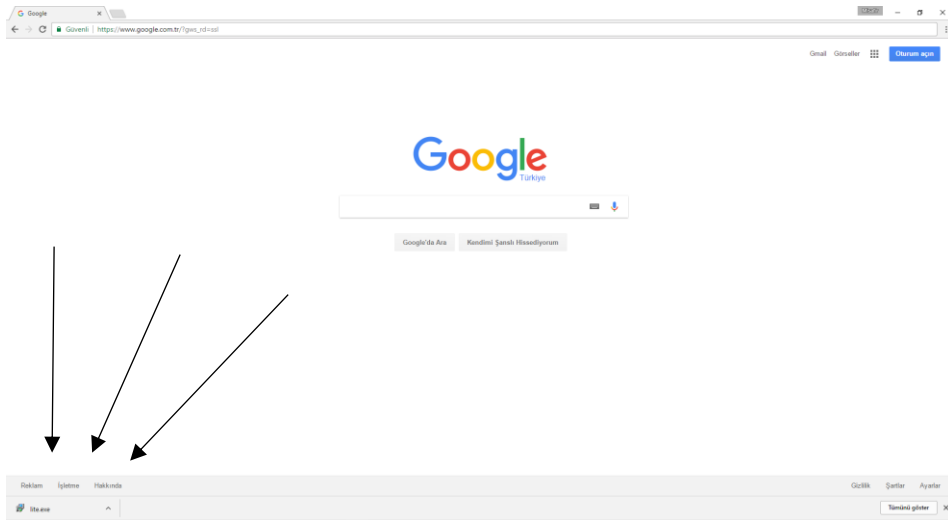


4. Kurulumu başlatdığımız uygulama için gelen ilk pencereye aşağıdaki resimdeki gibi “ **NEXT** ” tuşuna basınız.

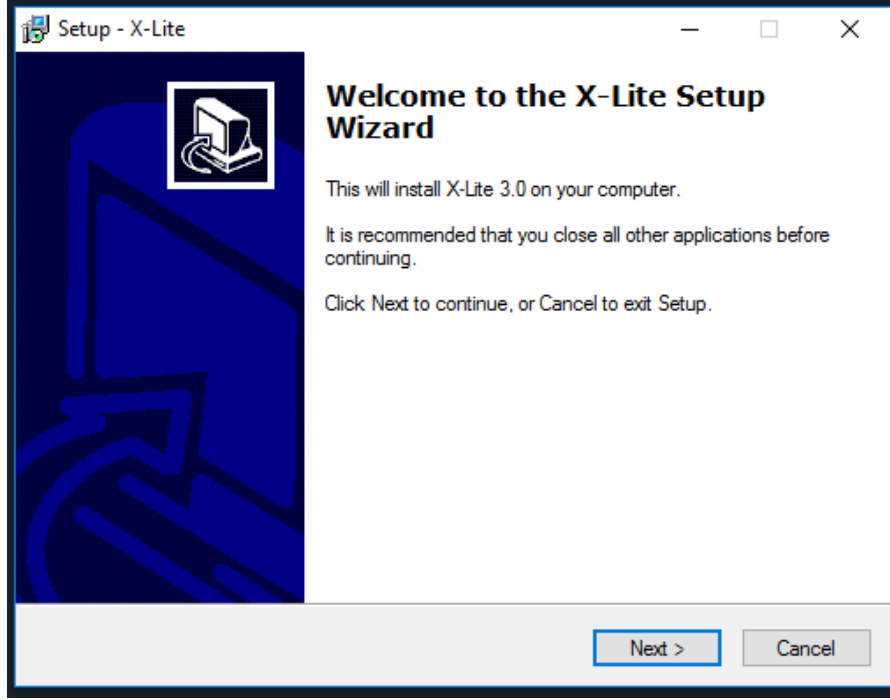


5. Sonraki pencerede, aşağıdaki resimdeki gibi önermeleri kabul edip sonra “ **NEXT** ” tuşuna basınız.




6. Sonraki pencerede, ařağıdaki resimdeki gibi “ **NEXT** ” tuřuna basınız.

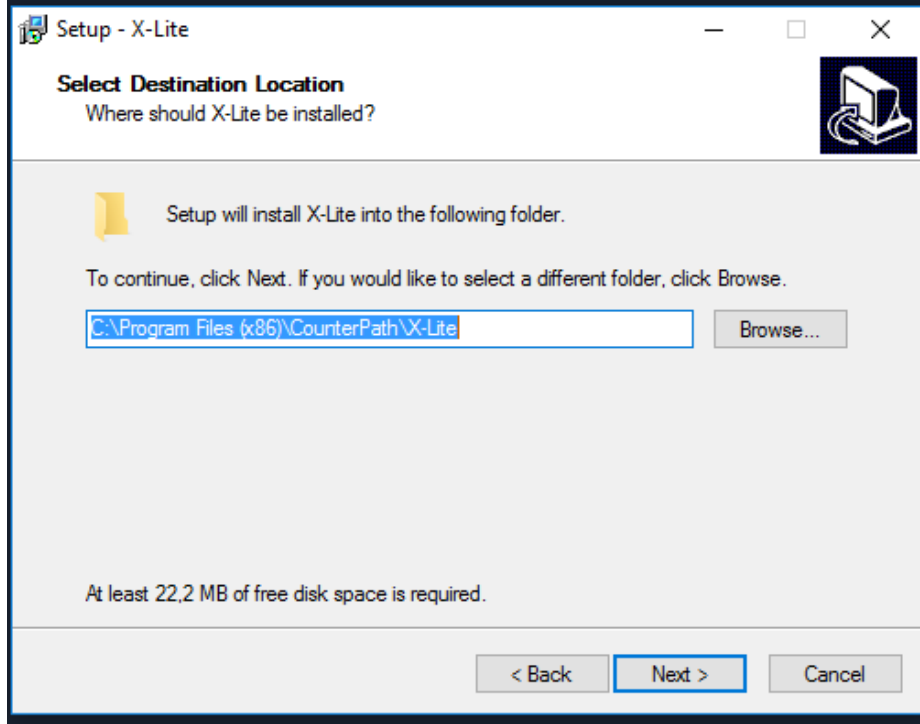

7. Sonraki pencerede, ařağıdaki resimdeki gibi “ **NEXT** ” tuřuna basarak kurulumu bařlatınız.

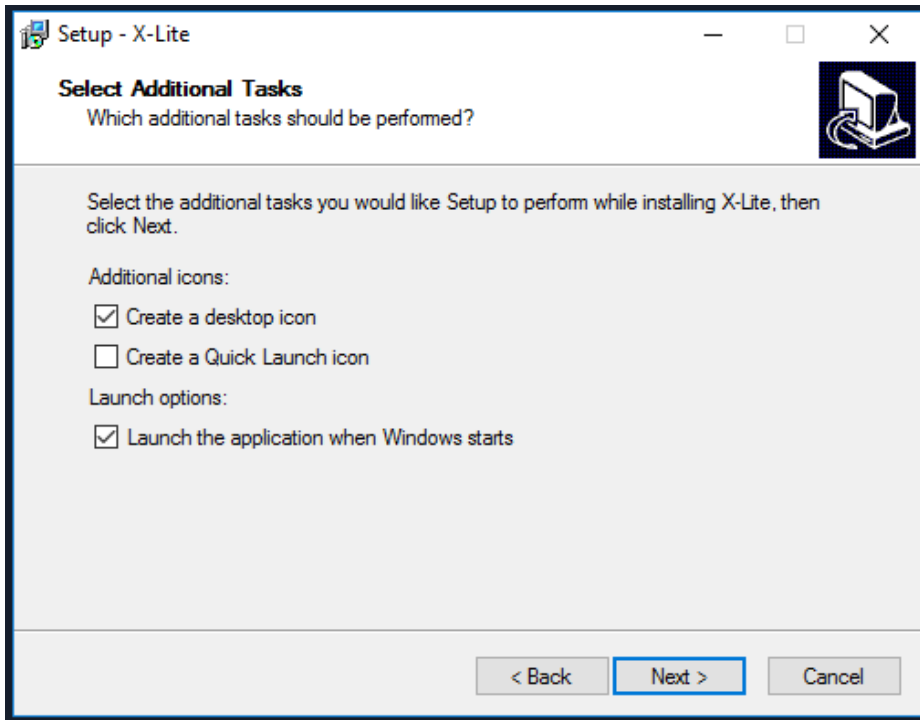


8. Daha sonra kurulumu bitirmek için aşağıdaki resimdeki gibi “ **FINISH** ” tuşuna basınız.

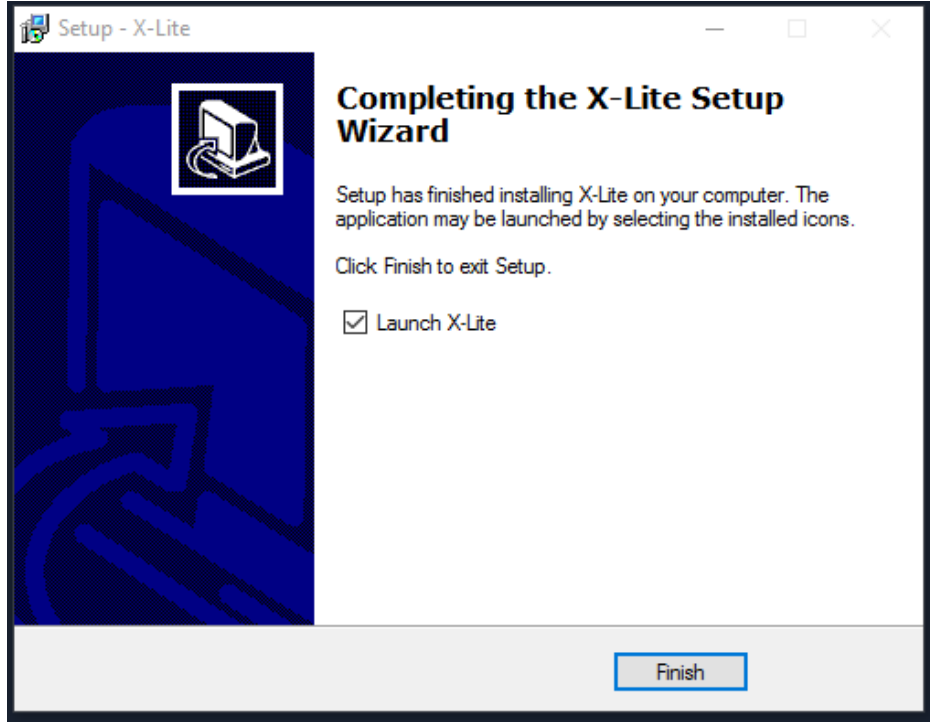


9. X-Lite programını kurduktan sonra, masaüstüne gelen X-lite simgesine mouse ile çift tıklayarak uygulamayı açıyoruz.



10. Açılan uygulama üzerine farenin sağ tuşu ile bir kez tıklayarak, aşağıdaki resimdeki gibi “ **SIP Account Setting** ” bölümüne giriniz.

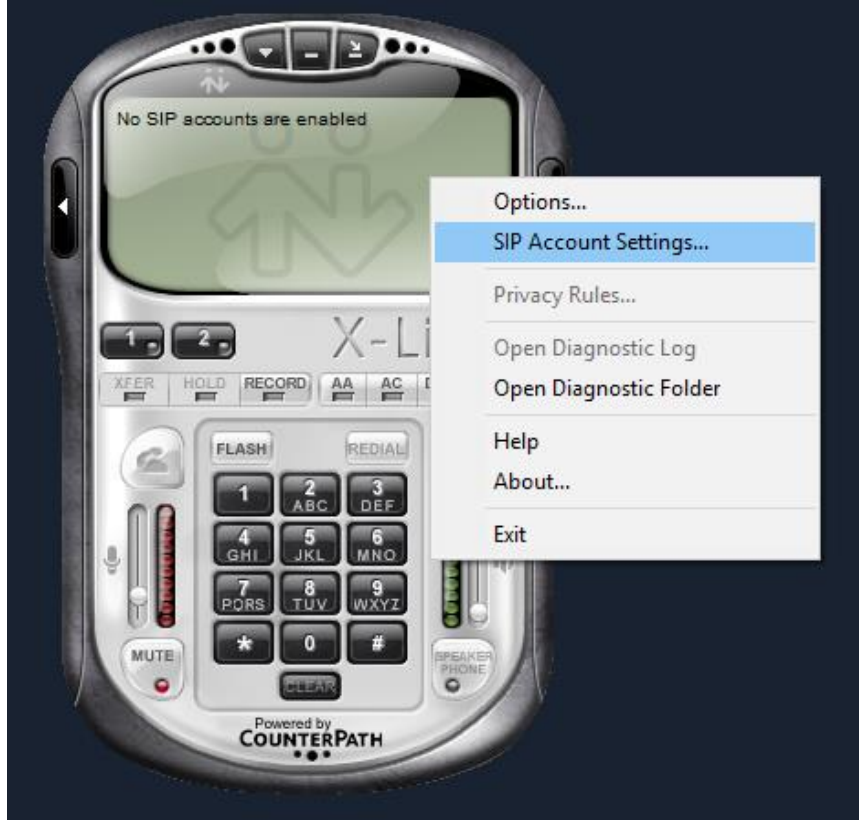

11. Açılan pencerede, yeni bir account (hesap) tanımlamak için, “ **Add...** ” tuşuna tıklayarak hesap özelliklerine giriniz.

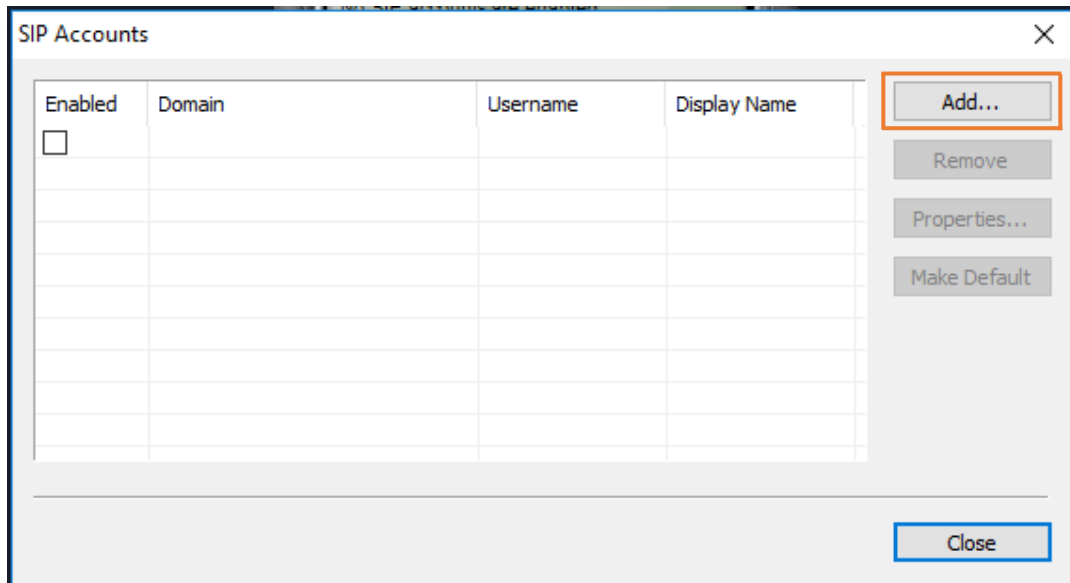

12. Açılan pencerede, mail adresinize atılan dosyadaki bilgilere göre **Account** segmesinde bulunan **User Details** (Kullanıcı detayları) kısmının bölümlerini doldurunuz.

Properties of Account1

Account Voicemail Topology Presence Advanced

User Details

Display Name

User name

Password

Authorization user name

Domain

Domain Proxy

☒ Register with domain and receive incoming calls

Send outbound via:

☐ domain

☐ proxy Address

☒ target domain

Dialing plan

#1\|a\|a.T;match=1;prestrip=2;

Tamam İptal Uygula

NOT: Yandaki resimdeki değerler örnek içindir. Lütfen kendi bilgilerinizi girdiğinizden emin olunuz.

Properties of Account1

Account Voicemail Topology Presence Advanced

User Details

Display Name

User name

Password

Authorization user name

Domain

Domain Proxy

☒ Register with domain and receive incoming calls

Send outbound via:

☐ domain

☐ proxy Address

☒ target domain

Dialing plan

#1\|a\|a.T;match=1;prestrip=2;

Tamam İptal Uygula

13. **Advanced** segmesine geçerek, burda bulunan **Register Settings**' deki 3600 saniyeyi, 300 saniye olarak değiştiriniz.

The screenshot shows the 'Properties of Account1' dialog box with the 'Advanced' tab selected. Under the 'Register Settings' section, the 'Reregister every' field is highlighted with an orange border and contains the value '3600'. The 'Min. time' field is set to '20' and the 'Max. time' field is set to '1800', both in seconds. In the 'Advanced Options' section, the checkboxes for 'Send SIP keep-alives' and 'Use rport' are checked. The 'Enable session timers' checkbox is unchecked, and the 'Default session time' is set to '60' seconds. The 'Session Timer Preference' is set to 'None'. At the bottom, there are three buttons: 'Tamam', 'İptal', and 'Uygula'.

The screenshot shows the 'Properties of Account1' dialog box with the 'Advanced' tab selected. Under the 'Register Settings' section, the 'Reregister every' field is highlighted with an orange border and contains the value '300'. The 'Min. time' field is set to '20' and the 'Max. time' field is set to '1800', both in seconds. In the 'Advanced Options' section, the checkboxes for 'Send SIP keep-alives' and 'Use rport' are checked. The 'Enable session timers' checkbox is unchecked, and the 'Default session time' is set to '60' seconds. The 'Session Timer Preference' is set to 'None'. At the bottom, there are three buttons: 'Tamam', 'İptal', and 'Uygula'.

14. Önce “**Uygula**” butonuna daha sonra “**Tamam**” butonuna basınız.

The screenshot shows the 'Properties of Account1' dialog box with the 'Advanced' tab selected. The 'Register Settings' section contains three input fields: 'Reregister every' with the value 300, 'Min. time' with the value 20, and 'Max. time' with the value 1800, all followed by the unit 'seconds'. The 'Advanced Options' section has two checked checkboxes: 'Send SIP keep-alives' and 'Use rport'. Below these, there is an unchecked checkbox for 'Enable session timers' and a 'Default session time' input field with the value 60, followed by the unit 'seconds'. At the bottom, the 'Session Timer Preference' is set to 'None' via a dropdown menu. At the bottom right of the dialog, three buttons are visible: 'Tamam', 'İptal', and 'Uygula'. The 'Uygula' button is highlighted with an orange border.


15. Hesap bilgilerin tanımlandığını gördümüz **SIP Accounts** penceresinden “**Close**” butonuna basarak çıkınız.

The screenshot shows the 'SIP Accounts' window. It features a table with four columns: 'Enabled', 'Domain', 'Username', and 'Display Name'. The first row has the following values: 'Enabled' is checked, 'Domain' is '90.158.44.140 (default)', 'Username' is '902129080463', and 'Display Name' is '902129080463'. To the right of the table are four buttons: 'Add...', 'Remove', 'Properties...', and 'Make Default'. At the bottom right of the window, a 'Close' button is highlighted with an orange border.


16. Bir sonraki aşamada, tekrar uygulama üzerine farenin sağ tuşu ile bir kez tıklayarak, aşağıdaki resimdeki gibi “ **Options...** ” bölümüne giriniz.




17. **General** segmesinde bulunan **Application** bölümüne tıklayınız. Aşağıdaki resimdeki gibi tık işaretlerin olması yeterli olacaktır.

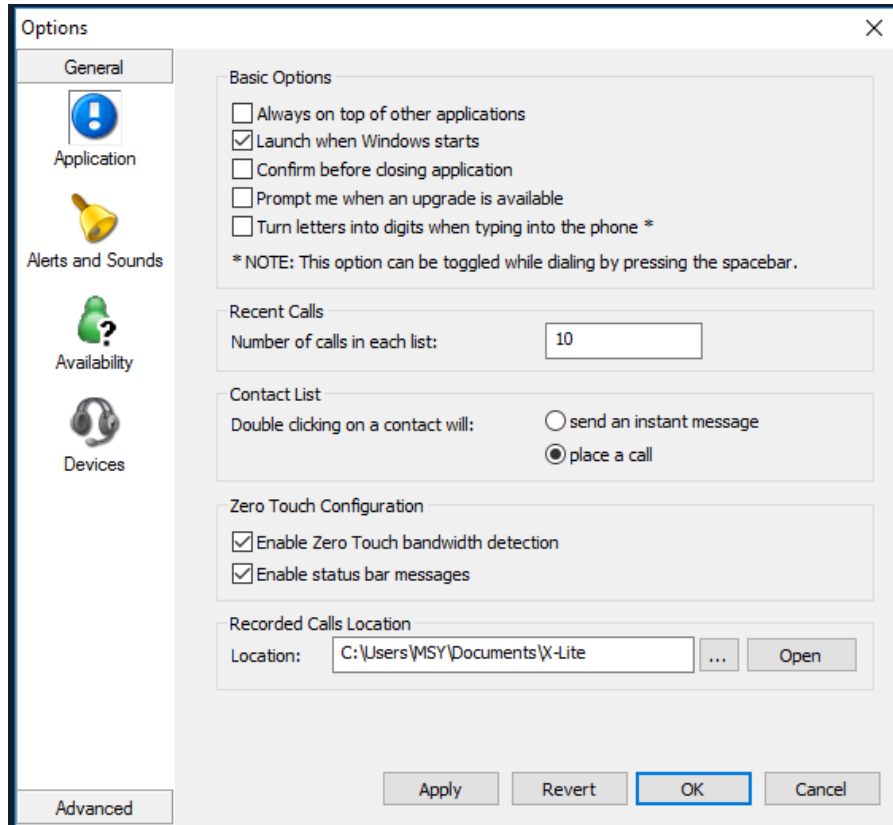


18. Daha sonra, **Devices** bölümüne tıklayınız. Burda “Headset” ve “Speakerphone” bölümlerin aşağıdaki gibi tek tük işaretli olması yeterli olacaktır.

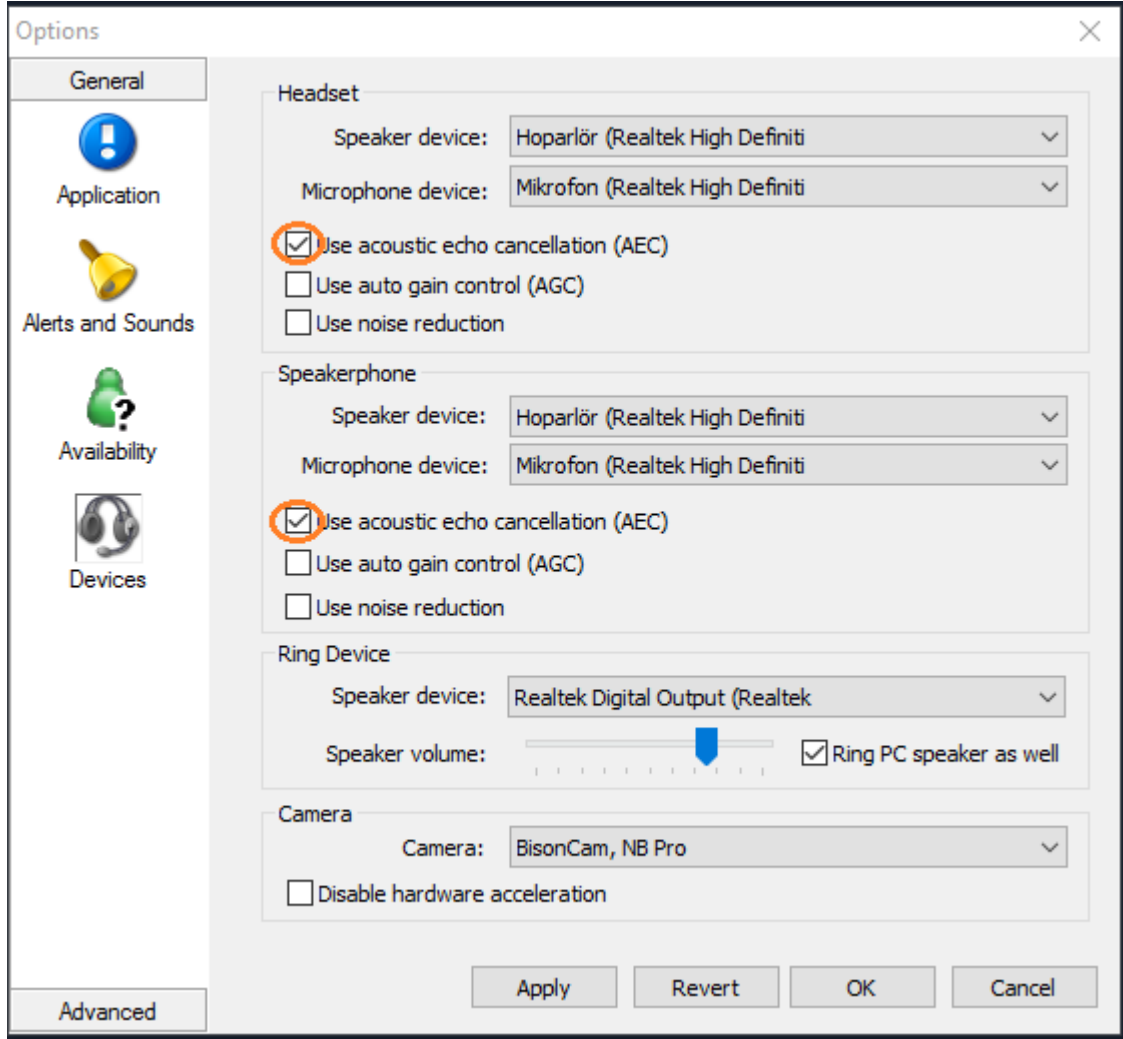


19. **Advanced** sekmesine tıklayarak, burdaki **Audio Codecs** bölümüne tıklayınız.

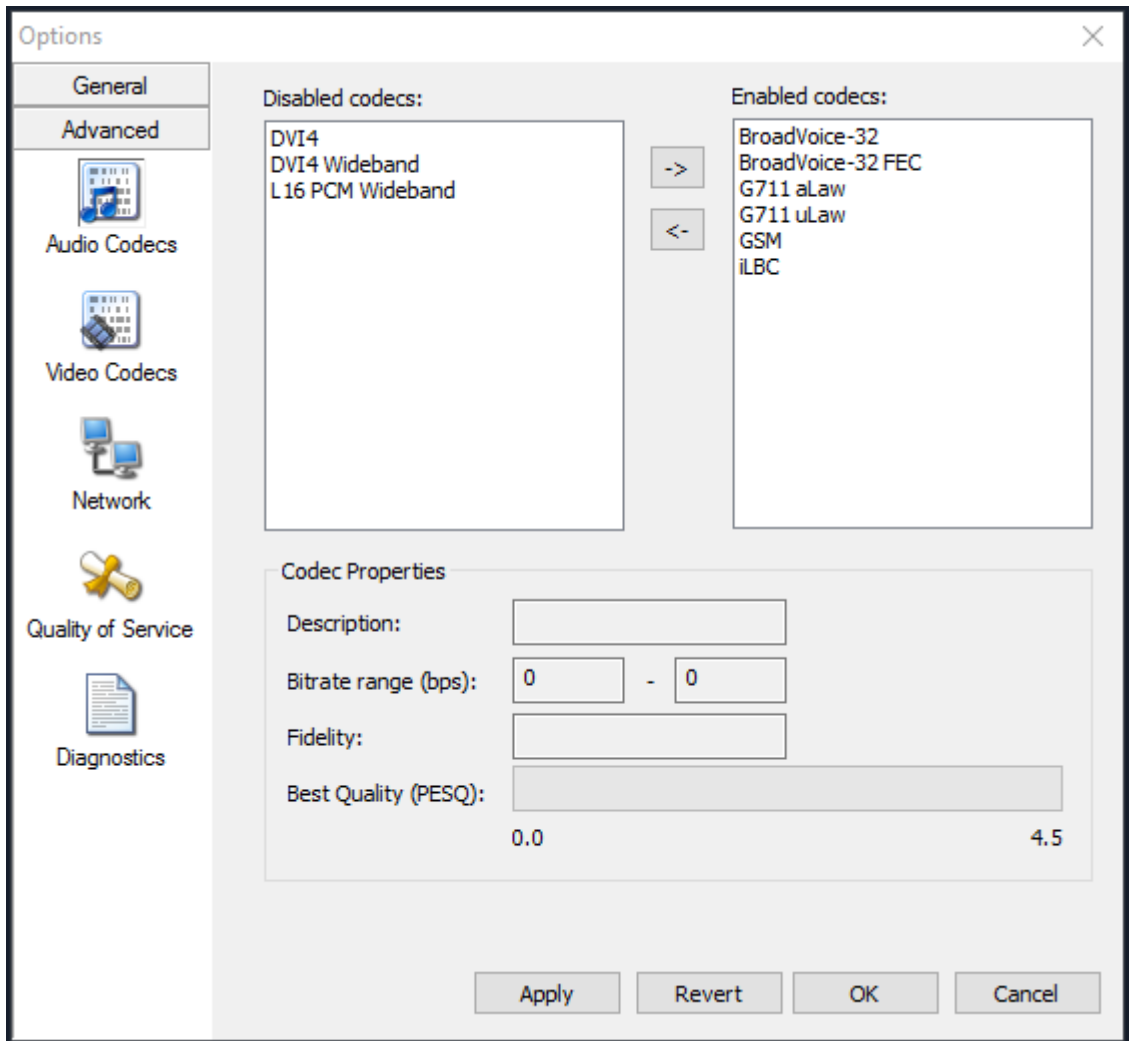


20. Daha sonra, burda bulunan “ Enabled Codecs ” listesinde, **G711aLaw** ve **G711uLaw** codecleri hariç, diğer codecleri seçip sol ok tuşuna basarak “ Disabled Codecs ” listesine aktarınız.

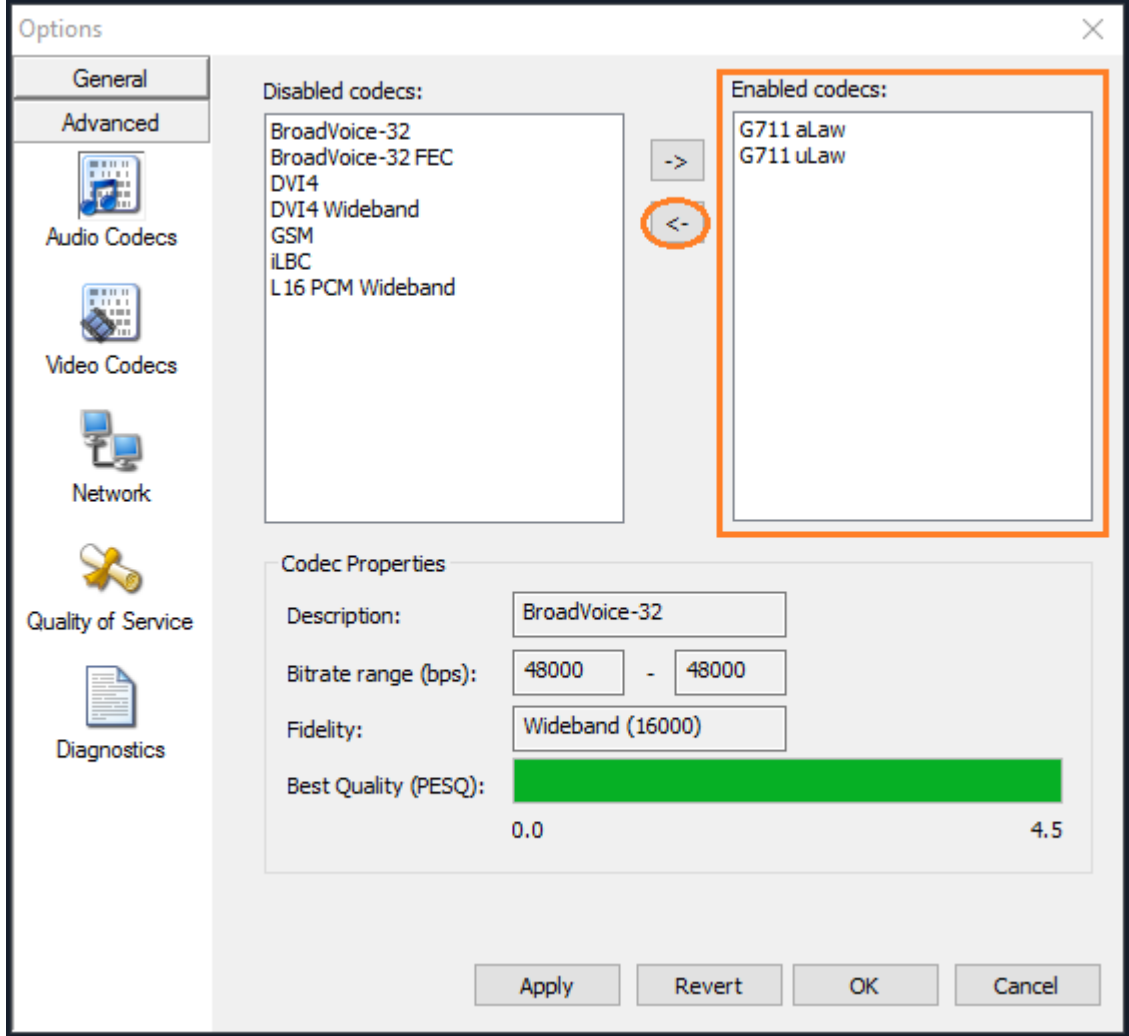

21. **Network** bölümüne tıklayınız.

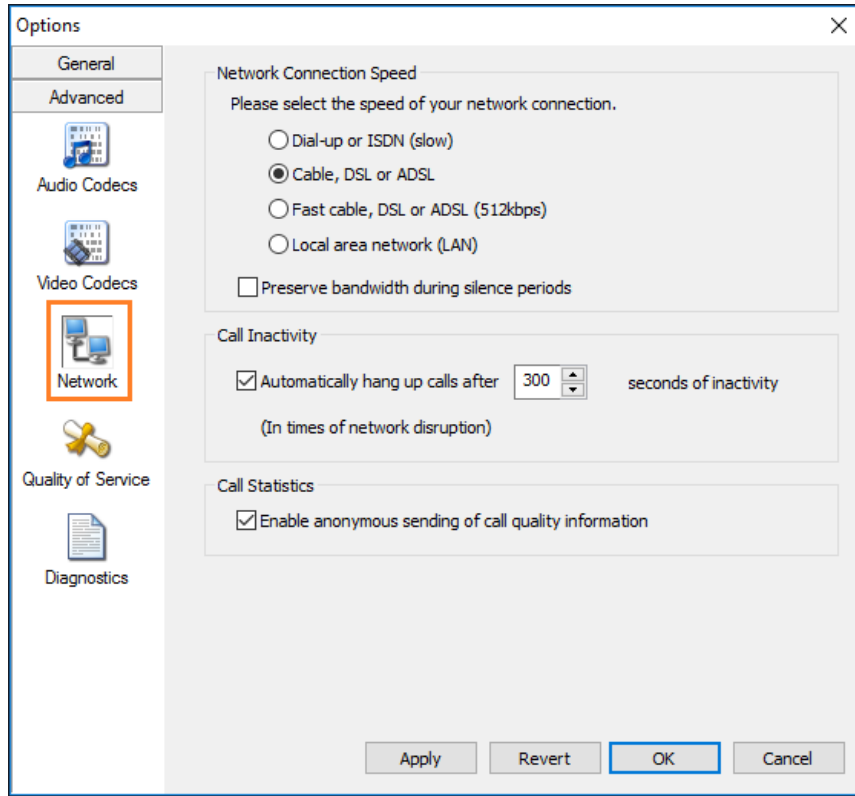

22. Burda bulunan “ Call Inactivity ” ve “ Call Statics ” bölümlerindeki tık işaretlerini kaldırınız.

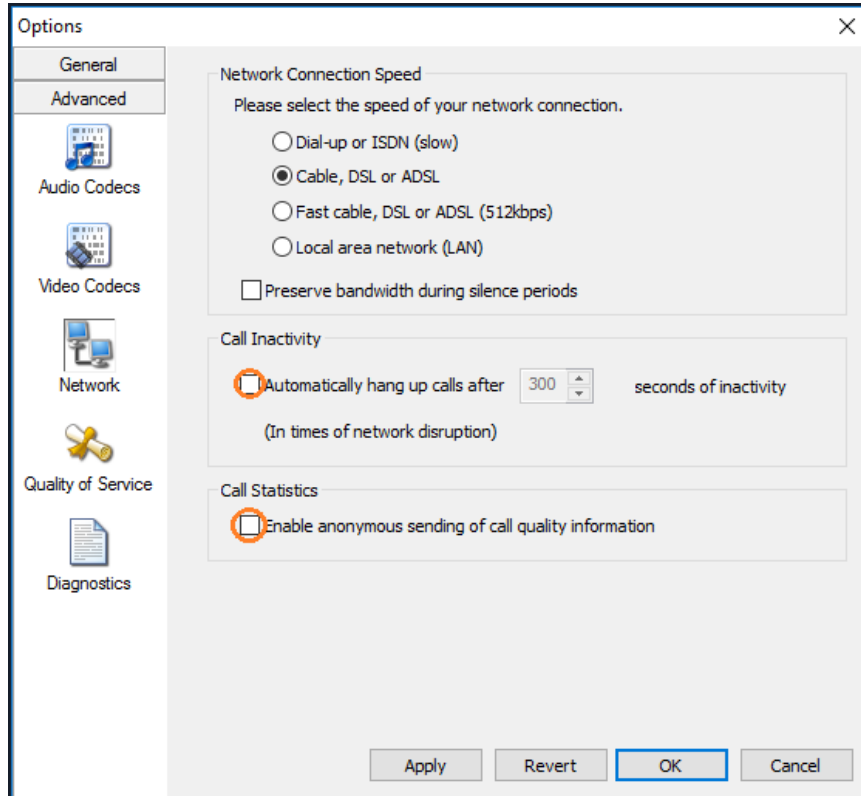

23. Önce “ **Apply** ” butonuna daha sonra “ **OK** ” butonuna basarak tüm ayarları tamamlanan uygulama kullanım için hazırdır.

